

Call our friendly team on 01243 558280

Weather Shop Ford Lane Business Park Ford, West Sussex BN18 0UZ www.weathershop.co.uk



Davis Vantage Vue Sensors & WeatherLink Live Bundle 6110 - Live Stream Your Weather Data


Product Images









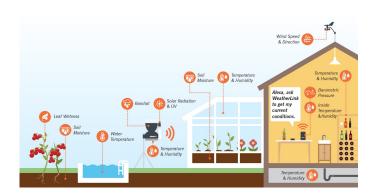





Short Description

Davis Vantage Vue solar-powered weather station including all-in-one outdoor sensor unit & 300m wireless performance. WeatherLink Live enables you to live-stream your weather station data over Wi-Fi or Ethernet directly to the WeatherLink Cloud and WeatherLink mobile apps.

Description

Because we are an authorised Davis Service Centre, we provide a FREE THREE YEAR WARRANTY on all Davis products purchased from us.

Step up to professional quality; Davis Vantage Vue wireless solar-powered weather station provides accurate, reliable weather monitoring in a self-contained, easy-to-install system.

The one-piece outdoor sensor suite installs in minutes and starts sending data wirelessly to the WeatherLink Live unit anywhere your console anywhere in your home, school, or business.

The WeatherLink Live unit live-streams your weather station data over Wi-Fi or Ethernet directly to the

WeatherLink Cloud and WeatherLink mobile apps. This data hub uses Davis's dependable, frequency-hopping, spread spectrum radio to collect data from your indoor and/or outdoor sensors.

Davis Vantage Vue 6110 UK Key Features

- Self-contained, easy-to-install system includes sensor suite, and WeatherLink Live
- Stream live data via Wi-Fi to the Internet (you don't even need a computer or Vantage Vue console!)
- Easy installation rain, wind, temperature & humidity sensors in self-contained sensor suite
- Industry-leading transmission range of 1,000'/300 m from the sensor suite to WeatherLink Live.
- Weather data updates every 2.5 seconds 10 x faster than the competition!
- Wind tunnel tested to 200mph (321kmph)
- Solar-powered outdoor sensor suite, with battery backup
- Connect 80+ sensors to one WeatherLink Live
- Three sensors integrated within the WeatherLink Live unit (barometric pressure, inside temperature and humidity)
- Works with Amazon Alexa and Google Assistant.

This version is ideal if you don't need a dedicated display console (you can always purchase one at a later date). If you need a console now, see the DI-6120UK.

Additional Information

Brand	Davis Instruments
Country of Manufacture	United States
Contents	Combined outdoor sensor unit and fixings. WeatherLink Live unit with power cable & optional ethernet cable Instruction manals Instruction manals
Explanation	The contract state and with power cable Segonal reference data. 1 In the state state of the contract state of the state of the contract state of the state of the contract stat
Ideal For	Education, Amateur, Interested, Gardeners, Agronomy
Indoor Unit	Weather Link Live Internal Sensors Brometric Fressure Resolution and Unites 0.01 til, 0.1 mm, 0.1 hPa, 0.1 mb, (user selectable) Range: 1.600 to 2.250 freg. 4.010 2.00 mm (§.5.040 to 1100 hPa or mb Elevation Range: -1.900 to 1.5,000 (4.600 m to 4.670 m) Elevation Range: -1.900 to 1.5,000 (4.600 m to 4.670 m) Undate internal: Inmitte Inside Relative Humidity Resolution: 0.151 Accuracy: 2.256 Update Internal: Inmitte Inside Temperature Resolution: Current Date 0.1* Range: -1.20* to 1.400* (100 v.600*) Range: -1.20* to 1.400* (100 v.600*) Update Internal: Inmitte Update Internal: Office (100 v.600*)
Dimensions	180 x 100 x 30 mm (WeatherLink Live)
Differsions	4 x AA for WeatherLink Live (for backup)
Batteries	
	UK 230V adapter included (EU 230V supplied to EU orders)
Batteries	The fully-integrated, corrosion-proof sensor suite (ISS) is built to take all the weather your location can give. The ISS combines a rain collector, temperature/humidity sensors, and anemometer/direction vane into a single unit for optimum performance and durability. The smaller profile sensor suite is designed to minimise visual impact in your garden or on your roof.
Batteries Power	
Batteries Power Outdoor Unix Sensors Dimensions	The fully-integrated, corrosion-proof sensor suite (ES) is built to take all the weather your location can give. The ES combines a rain collector, temperature/humidity sensors, and anemometer/direction value for a single unit for approximate profit sensor suite is designed to minimise visual impact in your garden or on your roof. - Rain Collector, Selfemphying spings goom ressures in with 0.2mm resolution. - Assenionated Records with speed as low as 2-mph and as high as 150 mph. - Wind Direction Measures with direction in compass rose points or degrees. - 29 x 146 x 340 mm
Batteries Power Outdoor Unit Sensors Dimensions Batteries	The fully-integrated, corrosion-proof sensor suite (ISS) is built to take all the weather your location can give. The ISS combines a rain collector, temperature/humidity sensors, and anemometer/direction varie into a single unit for opintum performance and durability. The smaller profile sensor suite is designed to minimise visual impact in your garden or on your roof. **Alian Collector-Self-emplying signing spoom neasures and with 0.2mm resolution.** **Alian Collector-Self-emplying signing spoom neasures rain with 0.2mm resolution.** **Alian Collector-Self-emplying signing spoom neasures rain with 0.2mm resolution.** **Alian Collector-Self-emplying signing spoom neasures rain with 0.2mm resolution.** **Alian Collector-Self-emplying signing spoom neasures rain with 0.2mm resolution.** **Alian Collector-Self-emplying signing spoom neasures rain with 0.2mm resolution.** **Alian Collector-Self-emplying signing spoom neasures rain with 0.2mm resolution.** **Alian Collector-Self-emplying signing spoom neasures rain with 0.2mm resolution.** **Alian Collector-Self-emplying signing spoom neasures rain with 0.2mm resolution.** **Alian Collector-Self-emplying signing spoom neasures rain with 0.2mm resolution.** **Alian Collector-Self-emplying signing spoom neasures rain with 0.2mm resolution.** **Alian Collector-Self-emplying signing spoom neasures rain with 0.2mm resolution.** **Alian Collector-Self-emplying signing spoom neasures rain with 0.2mm resolution.** **Alian Collector-Self-emplying signing spoom neasures rain with 0.2mm resolution.** **Alian Collector-Self-emplying signing spoom neasures rain with 0.2mm resolution.** **Alian Collector-Self-emplying spoom neasures rain with 0.2mm resolution.** **Alian Collector-Self-emplying spoom neasures rain of 0.2mm resolution.** **Alian Collector-Self-emplying spoom neasures rain with 0.2mm resolution.** **Alian Collector-Self-emplying spoom resolution.** **Alian Collector-Self-emplying spoom neasures rain with 0.2mm resolution.** **Alian Collector-Sel
Batteries Power Outdoor Unit Sensors Dimensions Batteries Power	The fully-integrated, corrosion-proof sensor suite (ISS) is built to take all the weather your location can give. The ISS combines a rain collector, temperature/humidity sensors, and anemometer/direction varie into a single unit to opinium performance and durability. The smaller profile sensor suite is designed to minimise visual impact in your garden or on your roof. * Rain Collector-Scient-Implying pissing spoom neasures and with 0.2 him resolution. * Anemometer Records work speeds as low as 2 mph and as high as 150 mph. * * Wind Direction Measures work direction in compass rose points or degrees. * 329 x 146 x 340 mm 1 x LT123 lithium back up battery required (not included). Ordinarily this should leat 2-3 years. * Solar powered * The design of the composite outdoor sensor unit makes for an eavi install with the included mounting hardware kit. The unit does need to be installed on too of a pole - see Mounting Options above for fire design of the composite outdoor sensor unit makes for an eavi install with the included mounting hardware kit. The unit does need to be installed on too of a pole - see Mounting Options above for the composite outdoor sensor unit makes for an eavi install with the included mounting hardware kit. The unit does need to be installed on too of a pole - see Mounting Options above for
Batteries Power Outdoor Unit Sensors Dimensions Batteries	The fully-integrated, corrosion-proof sensor suite (55) is built to take all the weather your location can give. The ISS combines a rain collector, temperature/humidity sensors, and anemometer/direction varie into a single unit for optimum performance and outsibility. The smaller profile sensors ruite is designed to minimize visual impact in your garden or on your roof. - Nami Collector of eliemphying toping soop measures rain with C2mm resolution Anemometer Records wind speech as low as 2 mph and as high as 150 mph The Collector of the Profile

Additional Options

Optional WeatherLink Cloud Pro Subscription	WeatherLink Pro (1 Year Subscription)
	WeatherLink Pro (3 Year Subscription)
Batteries	4 x AA Alkaline 1.5V Batteries for WeatherLink Live
Mounting Options	Universal Mounting Pole Kit (WS-7717) (Limited Offer)!
	Universal Crank-shaped Mounting Pole Kit (WS-7715-CRANK)
	Davis Mounting Pole Kit (DI-7717)
	Davis EZ-Mount Tripod (DI-7716-00)